



SECURITY DOOR CONTROLS ■ WWW.SDCSECURITY.COM
 801 Avenida Acaso, Camarillo, CA 93012
 [t] 800.413.8783 ■ 805.494.0622 ■ E-mail: service@sdsecurity.com

TEMPLATE-S6201

Devices covered by this template:
Panic / Fire SVR Exit Device Exit Only.

THIS SIDE UP FOR LHR DOOR

PLACE THIS SIDE ON FRAME STOP

PLACE THIS SIDE ON DOOR

FOLD HERE

CAUTION
 DO NOT USE DOOR EDGE

(4x) DEVICE MOUNTING HOLES

METAL: DRILL / TAP FOR 1/4"-20 MACHINE SCREWS

WOOD: PRE-DRILL 1/8" HOLES.

SEXBOLTS: DRILL 5/16" CLEARANCE HOLES ON PUSH SIDE, 3/8" HOLES ON PULL SIDE.

(2x) END CAP BRACKET HOLES

METAL: DRILL / TAP FOR 1/4"-20 MACHINE SCREWS.

WOOD: PRE-DRILL 1/8" HOLES.

SEXBOLTS: DRILL 5/16" CLEARANCE HOLES ON PUSH SIDE, 3/8" ON PULL SIDE.

CL OF DEVICE

TO FACE OF STOP BACKSET 2-7/16"

9/16"

1-3/16"

19/32"

OPTIONAL 1/2" dia. WIRE RUN

AFTER EXIT DEVICE IS MOUNTED, INSTALL END CAP BRACKET CENTERED ON DEVICE CL

40"

Watch for special mounting height requirements

FINISHED FLOOR

FRAME STOP

DOOR

FOLD HERE

THIS SIDE UP FOR RHR DOOR



TOP LATCH TEMPLATE

(3x) Top Strike Holes

METAL: DRILL / TAP FOR 1/4-20
MACHINE SCREWS

WOOD: 1/8" PILOT DRILL

PLACE THIS SIDE ON
TOP FRAME.

PLACE THIS SIDE ON
DOOR SURFACE SIDE


(2x) TOP LATCH HOLES

METAL: DRILL / TAP FOR 1/4-20"
MACHINE SCREWS

WOOD: PRE-DRILL 1/8" HOLES

LHR DOOR EDGE OR STOP FACE

RHR DOOR EDGE OR STOP FACE

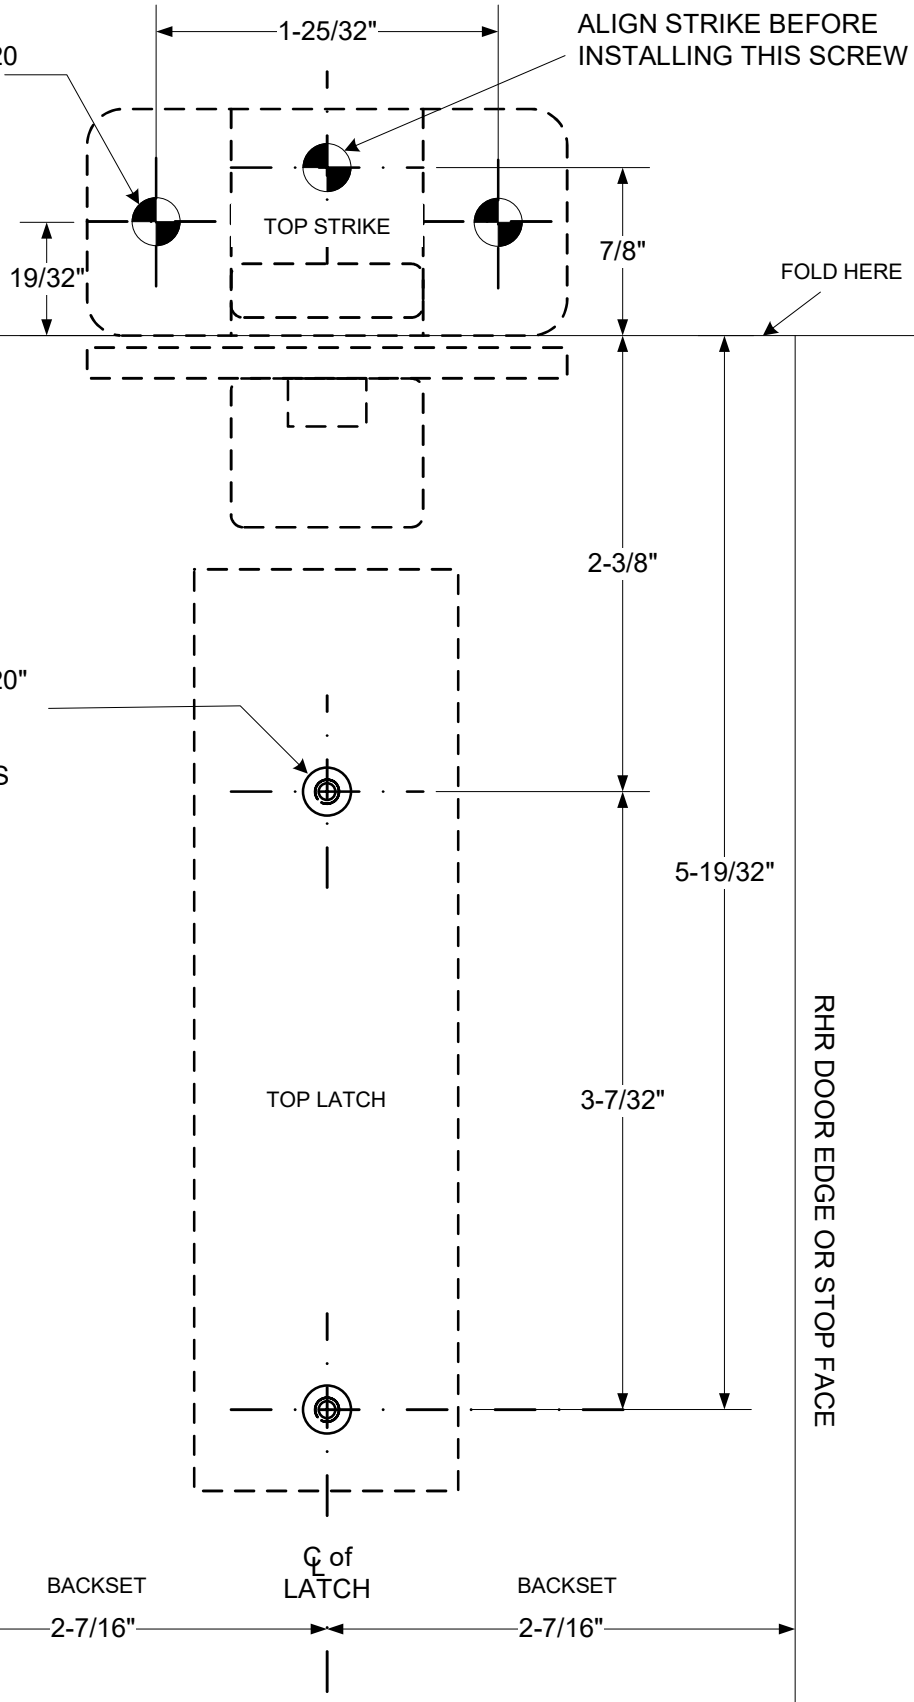



BOTTOM LATCH TEMPLATE

(NOT REQUIRED FOR LBR DEVICE)

